

PureLink™

Connect. Control. Complete.

MVS-41

4K60 4x1 Seamless Switch/Multiviewer/Scaling System



PureLink™
22-10 State Route 208
Fair Lawn, NJ 07410 USA
Tel: +1.201.488.3232
Fax: +1.201.621.6118
E-mail: sales@purelinkav.com

For order support, please contact your local dealer. For technical support, please contact us at support@purelinkav.com.

Contents

Introduction..... 3

Features 3

Package Contents..... 4

Specifications 4

Operation Controls and Functions..... 6

Front Panel..... 6

Rear Panel..... 6

IR Remote..... 8

EDID Settings 9

Video& Audio..... 19

Multiview 10

OSD Menu Navigation..... 10

RS-232 Command..... 11

Warranty..... 17

Introduction:

The PureLink MVS-41 provides 4x1 switching, multiview, and scaling conversion for two sources on a single screen. The user can easily manage each input and create any layout and position of any of the two inputs on a single monitor. This device supports full range of input video resolutions up to 4K@60 and audio RCA /Optical deembedding supported for external audio distribution systems. This device can be controlled via front panel buttons, IR remote, RS-232 commands.

Features:

- HDMI 2.0b, HDCP 2.2 and HDCP 1.x compliant
- 18Gbps video bandwidth
- Input and output resolutions support up to 4K2K@60 4:4:4
- LPCM, AC3, DD+, DTS, DTS-HD, up to 7.1 audio channel
- Seamless switching between input channels and combined multiple images on single UHD monitor
- Up to 4 display modes: SINGLE, PIP, PBP (1), PBP (2)
- Audio de-embedding via analog and optical fiber audio ports
- volume control and independent audio selection
- EDID management
 - Control via front panel buttons, IR remote, RS-232 commands
- Compact design for easy and flexible installation

Package Contents:

- 1 x 4K60 4x1 Multiviewer Seamless UHD Video Switcher
- 1 x IR Remote
- 1 x 3pin-3.81mm Phoenix Connector (male)
- 1 x 38KHz IR Wideband Receiver Cable (1.5 meters)
- 2 x Mounting Ears
- 4 x Machine Screws (KM3*4)
- 1 x 12V/2.5A Locking Power Adapter
(EUROPE, USA, UK, Australia, China)

Specifications:

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2 / 1.x
Video Bandwidth	18Gbps
Video Resolution	Up to 4K2K@60 4:4:4
IR Level	5Vp-p
IR Frequency	38KHz
Color Space ^{2 / 14}	RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0
Color Depth	8bit
Audio Formats	HDMI: PCM2.0/5.1/7.1CH, Dolby Digital/Plus, DTS, DTS High Res Analog audio [3.5mm L/R]: PCM2.0; SPDIF (OPTICAL): Dolby Digital, DTS 5.1, PCM2.0. Note: It does not support HBR audio.
ESD Protection	Human body model — ±8kV (Air-gap discharge) & ±4kV (Contact discharge)

Connection	
Input ports	4 x HDMI IN [Type A, 19-pin female]
Output ports	1 x HDMI OUT [Type A, 19-pin female] 1 x L/R OUTPUT [RCA] 1 x OPTICAL OUTPUT [S/PDIF]
Control ports	1 x RS-232 [3pin-3.81mm phoenix connector] 1 x IR EXT [3.5mm Stereo Mini-jack]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	220mm [W] x 100mm [D] x 30mm [H]
Weight	620g
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 12V/2.5A (US/EU standard, CE/FCC/UL certified)
Power Consumption	10W (Max)
Operating Temperature	32 - 104°F / 0 - 40°C
Storage Temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (non-condensing)

Operations and Functions:

Front



Rear




6

No.	Name	Function Description
1	Power button	<ul style="list-style-type: none"> • Short press this button to power on the device. • Long press this button for 1 seconds to enter the standby mode.
2	Power LED	The Power LED will light in green when the product is powered on, and red when the product is on standby.
3	4/ Input 1-4 LEDs	Input signal indicator lights. When the port connects with an active source device, the 14 corresponding green LED will be on. Note: Only the LED of the selected input channel will illuminate green on single screen display mode; all LEDs will illuminate green on multiview mode.
4	IR Window	IR signal receiving window.
5	INPUT button	Input source switching button, only available on single screen display mode.

6	Multiview button	<p>Multiview display mode switching button.</p> <ul style="list-style-type: none"> • Short press this button to circularly select: SINGLE - PIP - PBP (1) - PBP (2) . • Long press this button for 3 seconds to select the aspect ratio for PBP (1) / PBP (2)
7	RES button	<p>Output resolution switching button.</p> <ul style="list-style-type: none"> • Short press the RES button to circularly switch the output resolution of the HDMI OUTPUT port (Please refer to the output resolution list of “8. Video & Audio”). • Long press the RES button for 3 seconds to switch the output resolution to 720P60.

1	OPTICAL port	Optical fiber digital audio output port.
2	L/R Port	PCM2.0 Analog Audio Output Port
3	HDMI OUTPUT port	HDMI signal output port, connected to HDMI display device such as TV or Monitor with HDMI cable.
4	1-4 INPUT ports	HDMI signal input ports, connected to HDMI source device such as DVD or Set-top box with HDMI cable.
5	RS-232 port 5 / 14	3-pin phoenix connector, connected to a PC or control system for serial port upgrade or RS-232 command control.
6	IR EXT port	<p>IR signal receiving port, connected with 38KHz IR Receiver cable.</p> <p>If the IR signal receiving window of the unit is blocked or the unit is installed in a closed area out of infrared line of sight, the IR receiver cable can be inserted to the “IR EXT” port to receive the IR remote signal.</p>
7	DC 12V	DC 12V/1A power input port.

IR Remote

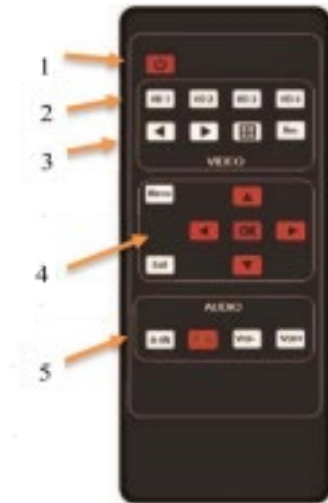

- ① Power on or Standby: power on the switcher or set it to standby mode.
- ② Input: Select Inputs 1 through 4
- ③ Multiview display mode buttons: select SINGLE - PIP - PBP (1) - PBP (2).
- ④ Menu Navigation
- ⑤ Audio Settings^{6/14}

EDID Settings:

Select from the following EDID modes via RS-232 command or OSD menu navigation.

No.	EDID Mode	No.	EDID Mode
1	4K60-2.0CH	10	1920x1200-2.0CH
2	4K60-5.1CH	11	1680x1050-2.0CH
3	4K60-7.1CH	12	1600x1200-2.0CH
4	4K30-2.0CH	13	1440x900-2.0CH
5	4K30-5.1CH	14	1360x768-2.0CH
6	4K30-7.1CH	15	1280x1024-2.0CH
7	1080P-2.0CH	16	1024x768-2.0CH
8	1080P-5.1CH	17	720P-2.0CH
9	1080P-7.1CH	18	AUTO

Video & Audio:

The switcher provides multiple resolution video input up to 3840x2160@60, and multiple audio formats such as LPCM, AC3, DD+, DTS, DTS- HD, up to 7.1 channel pass through function via HDMI cable.

Users can control the volume of audio in LPCM format.

The switcher allows the following video output resolutions;

No.	Output Resolution	No.	Output Resolution
1	4096x2160p 60Hz	8	1920x1080p 60Hz
2	4096x2160p 50Hz	9	1920x1080p 50Hz
3	3840x2160p 60Hz	10	1360x768p 60Hz
4	3840x2160p 50Hz	11	1280x800p 60Hz
5	3840x2160p 30Hz	12	1280x720p 60Hz
6	3840x2160p 25Hz	13	1280x720p 50Hz
7	1920x1200p 60Hz RB	14	1024x768 60Hz

Multiview:

The switcher has 4 categories of multiview display modes: SINGLE, PIP, PBP (1), PBP (2) Users can select different operations for different Multiview modes as following:

SINGLE: Inputs selection

PIP: Inputs selection, Sub window size and position selection PBP (1), PBP (2): Inputs selection,

Display mode selection, Display aspect selection Multiview window distributions are as following:

SINGLE PIP PBP (1) PBP (2)

Users can select Multiview modes via RS-232 commands or OSD menu navigation

OSD Menu Navigation:

A total of four buttons on the IR Remote are used for audio setting on OSD menu navigation, including Baud, Mute, VOL-, VOL+. Menu contents are as follows:

Baud	Baud rate	115200	115200,57600,38400, 19200,9600
Mute	Audio Mute	OFF	ON, OFF
VOL- /VOL+	Audio Volume 8 / 14	100	0..100

RS232 Commands & Setup:

Connect the RS-232 port of the product to a PC with a 3-pin phoenix connector cable.

Setup Data
Serial port protocol: baud rate: 115200(default) Data bits: 8 Stop bits: 1 Check bit: 0
x - Parameter 1; y - Parameter 2; ! - Delimiter

Command Code	Function Description	Example	Feedback
System Setting			
help!	List all commands	help!	
r type!	Get device model	r type!	MVS-41
r fw version !	Get Firmware version	r fw version!	MCU FW version x.xx.xx SCALER FW version x.xx.xx
power z!	Power on/off the device,z=0~1 (z=0 power off, z=1 power on)	power 1!	Power on System Initializing... Initialization Finished! MCU FW version x.xx.xx SCALER FW version x.xx.xx
r power!	Get current power state		power on/power off
reboot!	9 / 14 Reboot the device	reboot!	Reboot... System Initializing... Initialization Finished! MCU FW version x.xx.xx SCALER FW version x.xx.xx

reset!	Reset to factory defaults	reset!	Reset to factory defaults System Initializing... Initialization Finished! MCU FW version x.xx.xx SCALER FW version x.xx.xx
--------	---------------------------	--------	---

Command Code	Function Description	Example	Feedback
Output Setting			
s output res x!	Set Output Resolution (x=1~14) 1. 4096x2160p60, 2. 4096x2160p50, 3. 3840x2160p60, 4. 3840x2160p50, 5. 3840x2160p30, 6. 3840x2160p25, 7. 1920x1200p60RB, 8. 1920x1080p60, 9. 1920x1080p50, 10. 1360x768p60, 11. 1280x800p60, 12. 1280x720p60, 13. 1280x720p50, 14. 1024x768p60,	s output res 3!	out resolution: 3840x2160p60
r output res!	Get output resolution	r output res!	out resolution: 3840x2160p60
s output hdcpx!	set output hdcpx (x=1~3) 1. HDCP 1.4 2. HDCP 2.2 3. 10. HDCP / 14 OFF	s output hdcpx 2!	output HDCP: HDCP 1.4
r output hdcpx!	Get output hdcpx status.	r output hdcpx!	output HDCP: HDCP 1.4
s output vkax!	Set output video keep active pattern. (x=1~2) 1. black screen 2. blue screen	s output vka 1!	output VKA pattern: black screen
r output vkax!	Get output video keep active pattern.	r output vka!	output VKA pattern: black screen

s output itc x!	Set output video mode (x=1~2) 1: video mode 2: pc mode	s output itc 1!	output ITC: video mode
r output itc!	Get output video mode	r output itc!	output ITC: video mode

Command Code	Function Description	Example	Feedback
--------------	----------------------	---------	----------

EDID Setting			
s input EDID x!	Set HDMI input EDID mode (x=18) 1. 4K2K60_444, Stereo Audio 2.0 2. 4K2K60_444, Dolby/DTS 5.1 3. 4K2K60_444, HD Audio 7.1 4. 4K2K30_444, Stereo Audio 2.0 5. 4K2K30_444, Dolby/DTS 5.1 6. 4K2K30_444, HD Audio 7.1 7. 1080P, Stereo Audio 2.0 8. 1080P, Dolby/DTS 5.1 9. 1080P, HD Audio 7.1 10. 1920x1200, Stereo Audio 2.0 11. 1680x1050, Stereo Audio 2.0 12. 1600x1200, Stereo Audio 2.0 13. 1440x900, Stereo Audio 2.0 14. 1360x768, Stereo Audio 2.0 11 / 14 15. 1280x1024, Stereo Audio 2.0 16. 1024x768, Stereo Audio 2.0 17. 720p, Stereo Audio 2.0 18. copy from HDMI out	s input EDID 1!	input EDID: 4K2K60_444, Stereo Audio 2.0

r input EDID!	Get input EDID mode	r input EDID!	input EDID:4K2K60_444, Stereo Audio 2.0
Audio Setting			
s output audio x!	Set output audio source (x=0~2) 0. follow window 1 selected source 1. HDMI 1 input audio 2. HDMI 2 input audio	s output audio 0!	output audio: follow window 1 selected source
	Get output audio source	r output audio!	output audio: follow window 1 video

s output audio vol+!	Increase output audio volume	s output audio vol+!	output audio volume: 50
s output audio vol-!	Decrease output audio volume	s output audio vol-!	output audio volume: 50
s output audio vol x!	Set output audio volume value (x=0~100)	s output audio vol 30!	output audio volume: 30
r output audio vol!	Get output audio volume	r output audio vol!	output audio volume: 30

Command Code	Function Description	Example	Feedback
s output audio mute x!	Set output audio mute on/off (x=0~1) 0. mute off 1. mute on	s output audio mute 0!	output audio mute: off
r output audio mute!	Get output audio mute on/off	r output audio mute!	output audio mute: off
Single Screen Mode Setting			
s auto switch x!	Enable/disable auto switch feature(x=0~1) 0. Disable auto switch 1. Enable auto switch	s auto switch 0!	auto switch off

r auto switch!	Get auto switch feature		auto switch off
s in source x!	Route input source to output (1~4)	s in source 1!	HDMI 1
r in source!	Get output selected input source	r in source!	HDMI 1
Multi-viewer Mode Setting			

s multiview x!	Set multi-viewer display mode (x=1~3) 1. single screen 2. PIP 3. PBP	s multiview 1!	single screen
r multiview!	Get multi-viewer display mode	r multiview!	single screen
s quad mode x!	Set quad windows display mode (x=1~2)	s quad mode 1!	quad mode 1
s window x in y!	Select one input for one display window for the current Multiview mode. (x=1~2) 1. window 1 2. window 2 (y=1~2) 1. HDMI 1 2. HDMI 2	s window 1 in 1!	window 1 select HDMI 1

r window x in!	Get windows selected input source (x=0~2) 0. ALL 1. window 1 2. window 2	r window 1 in!	window 1 select HDMI 1
----------------	--	----------------	------------------------

s PIP position x!	Set PIP window position (x=1~4) 1. Left Top 2. Left Bottom 3. Right Top 4. Right Bottom	s PIP position 3!	PIP on right top
r PIP position!	Get PIP window		PIP on right top

s PIP size x!	Get PIP window size (x=1~3) 1. small 2. middle 3. large	s PIP size 3!	PIP size: large
r PIP size!	Get PIP window size	r PIP size!	PIP size: large

s PBP mode x!	Set PBP windows display mode (x=1~2) 1. PBP mode 1 13 / 1 2. PBP mode 2	s PBP mode 1!	PBP mode 1
r PBP mode!	Get PBP windows display mode	r PBP mode!	PBP mode 1
s PBP aspect x!	Set PBP windows display aspect ratio (x=1~2) 1. Full screen 2. 16:9	s PBP aspect 1!	PBP aspect: full screen
r PBP aspect!	Get PBP windows display aspect ratio	r PBP aspect!	PBP aspect: full screen

Warranty

PureLink Five (5) Year Limited Warranty for PureStream™ Branded Products Only

Dtrovision, LLC. (hereinafter "PureLink") warrants its HDTools and PureStream™ branded products (hereinafter "Product") purchased directly from PureLink or Dealer shall be free from defects in workmanship and materials, under normal use and service, for a period of five (5) years on parts and five (5) years on labor. Any repaired or replaced equipment related to Product shall be covered only under the remaining portion of the warranty. This warranty has no relationship to and exists independently of any warranty offered by Dealer. This warranty is a limited warranty and gives you specific legal rights. You may also have other rights which vary from state to state.

TERMS & CONDITIONS

PureLink shall repair or replace the Product if it develops a material fault during the period of warranty, on condition that i) the Product has only been subject to normal use in a domestic or commercial environment in a manner consistent with its specification and functionality, ii) the Product has been cared for reasonably and only subjected to reasonable wear and tear, iii) the defect has not been caused by willful or negligent abuse or neglect, or any accident or improper installation procedure, iv) the serial number of the Product has not been altered or removed. This warranty only applies to the original purchaser, and shall be the exclusive remedy to the original purchaser. PureLink shall not be liable for any damages whatsoever caused by Product or the failure of Product to perform, including incidental or consequential damages. PureLink shall not be liable for any claim made by a third party or made by the purchaser for a third party. Except as expressly set forth in this warranty, PureLink makes no other warranties, expressed or implied, including any implied warranties of merchantability and fitness for a particular purpose. PureLink expressly disclaims all warranties not satisfied in this limited warranty. Any implied warranties that may be imposed by law are limited to the terms of this limited warranty. This warranty statement supersedes all previous warranties.

WARRANTY RETURNS/REPAIRS/EXCHANGES

No merchandise may be returned without prior authorization from PureLink, and a Return Materials Authorization (RMA) number. Failure to comply with these conditions will result in rejection of the returned merchandise. Any warranty service on Products must be arranged through Dealer. Authorized returns must be shipped freight prepaid and fully insured to PureLink, Fair Lawn, NJ USA, with the RMA number clearly marked on the outside of all shipping boxes and containers. PureLink reserves the right at its sole discretion to refuse any shipments arriving freight collect or without an RMA number. Any authorized returned merchandise must be accompanied by a note describing the reason for return, along with contact information including name, phone number, return mailing and shipping addresses, e-mail address, and RMA number. On any products returned and accepted with an RMA number, return freight charges following repair of items under warranty shall be paid by PureLink, shipping by the standard ground carrier of its choice.

ADVANCE WARRANTY REPLACEMENTS

PureLink's advance replacement service offers a Replacement Unit upon request - free of charge for eligible products purchased less than one (1) year of the warranty claim. Products purchased more than one (1) year prior to the warranty claim do not qualify for advance replacement services. Advance replacement requests must be validated by a member of PureLink's Technical Support Team. Replacement units may be new or refurbished and are subject to availability. PureLink is responsible for shipping the Replacement Unit to your designated location by standard ground service. All other shipping methods will be the responsibility of the Dealer. Original Unit Return – the Original Unit must be returned within thirty (30) calendar days of the return authorization date. Failure to return the Original Unit within this period will be subject to a minimum 15% re-stocking fee. Dealer is solely responsible for the shipping of the Original Unit to PureLink.

TO MAKE A WARRANTY CLAIM

To make a warranty claim, promptly notify PureLink within the warranty periods described above by calling PureLink's Technical Support Department at 1-201-488-3232. PureLink, in its sole discretion, will determine what action, if any, is required under this warranty. Most problems can be corrected over the phone through close cooperation between Customer and a PureLink technician. To better enable PureLink to address a warranty claim, please have the Product's serial and model numbers. If PureLink, in its sole discretion, determines that an on-site visit or other remedial action is necessary, PureLink may send a representative to Customer's site.

CUSTOMER SERVICE

Technical support inquiries can be submitted electronically through the PureLink website at www.purelinkav.com. For immediate assistance please contact PureLink's Customer Care Team at +1 (201) 488-3232.