

4K60 to FHD Capture Card with Audio IO and Loop Out

PT-C-HDBUSB



Overview

Capture and stream your content effortlessly with the 4K60 to FHD Capture Card with Audio IO and Loop Out, designed for smooth, high-resolution recording and live broadcasting. With simple plug-and-play connectivity, you can quickly capture video to OBS, Broadcaster, VLC, and other popular software without complex setup.

The capture card features HDMI loop-out for confidence monitoring of your input, stereo audio output for local monitoring, and a dedicated microphone input, making it ideal for podcasting, streaming, or recording gameplay and presentations. Video is captured at 4K60 and scaled to FHD for reliable, high-quality results.

Compact, intuitive, and ready to use out of the box, the 4K60 to FHD 1080P60 Capture Card keeps your workflow streamlined and professional, giving you complete control over both video and audio for any production or live stream.

Standards & Compliance

4K  **HDR10+** **USB-C** **HDMI**

Key Features

Capture 4K60 Video (converted to 1080P60) to Your Computer

Monitor Your Input with HDMI Loop Out

Add a Microphone for Streaming or Recording

Listen with Built-In Headphone Output

Compatible with All Popular Capture Software

Compact, Plug-and-Play Setup

4K60 to FHD Capture Card with Audio IO and Loop Out

PT-C-HDBUSB


Standards & Compliance	Signal Standards	USB 3.0, HDMI 1.4, HDMI 1.3
	Regulatory Certifications	CE, FCC, RoHS
Connector Types	HDMI Inputs	1 × HDMI IN (Type A, 19-pin female)
	HDMI Outputs	1 × HDMI OUT (Type A, 19-pin female)
	USB Output	USB-A
	Audio Inputs	Analog (L/R TRS, 3.5mm jack)
	Audio Outputs	Analog (L/R TRS, 3.5mm jack)
Performance	Max Video Resolution	4K60 (4:4:4)
	Video Bandwidth	18 Gbps
	Color Space	RGB, YUV, YPbPr, YCbCr
	Color Depth	8-bit, 10-bit, 12-bit
	Dynamic Metadata Support	HDR10+, HDR10
	MTBF	50,000 hours
	HDMI Audio Format	Bitstream, Dolby, DTS, DSD, LPCM
	ESD Protection	Human body model (+8kV)
Power	Power Input	AC 100 - 240V 50/60Hz
	Power Supply	DC 12V/2.5A
	Power Consumption	4W (Max)
Environmental	Operating Temperature	34 to 122°F / 0 to 50°C
	Storage Temperature	34 to 122°F / 0 to 50°C
	Relative Humidity	5 to 90% RH (no condensation)
Enclosure	Dimensions	Width: 5.3in (136mm) Depth: 2.3in (60mm) Height: 0.7in (17mm)
	Weight	0.15 lbs (70g)

4K60 to FHD Capture Card with Audio IO and Loop Out

PT-C-HDBUSB

Warranty	Parts	1 year
	Labor	1 year

Application Diagram

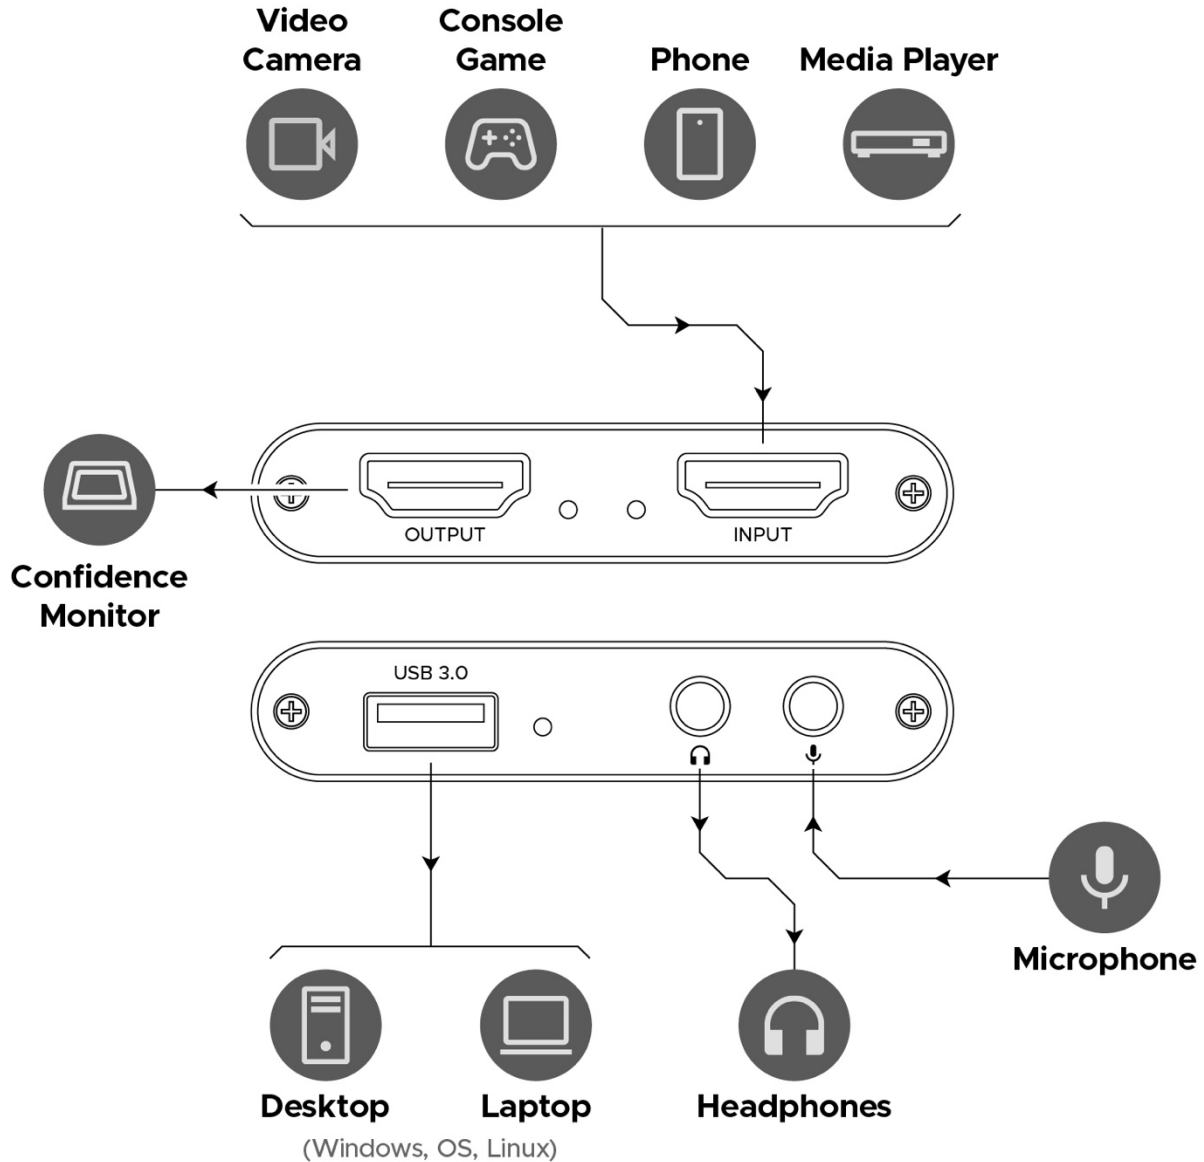

For further information,
contact support@bundltech.com

© 2025 Bundl. Bundl, the Bundl logo, and other Bundl marks are owned by Bundl and may be registered trademarks. All other trademarks are the property of their respective owners. Bundl assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein are subject to change without notice.