


8K60 1x4 HDMI Splitter with Audio De-Embed

PT-SP-BHDT14-48G

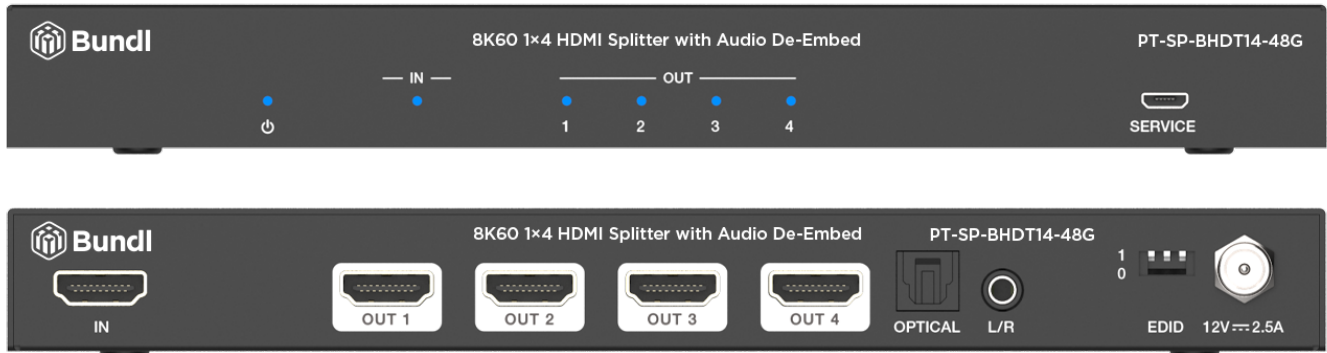

Overview

Enjoy stunning clarity and effortless connectivity with the 8K60 1x4 HDMI Splitter with Audio De-Embed, designed to distribute one HDMI source to up to four displays with exceptional precision. Supporting up to 8K60 resolution with HDR10+ and Dolby Vision, it delivers vibrant color, sharp contrast, and smooth motion for every frame.

Perfect for home theaters, gaming setups, or digital signage, this 1x4 HDMI distribution amplifier ensures consistent, lag-free performance across all screens. The 8K60 HDMI Splitter also features analog and optical audio de-embedding, letting you easily connect external sound systems for an immersive audio experience.

With advanced EDID management, installation is quick and compatibility is seamless — no guesswork required. Compact, reliable, and plug-and-play ready, it's the ultimate choice for anyone looking to expand their 8K60 entertainment system with confidence and quality.

Standards & Compliance



Key Features

- 8K60 Output
- Share One Source to Four Screens
- 1 HDR10+ & Dolby Vision
- Connect External Speakers Easily
- EDID Management
- Lag-Free Playback
- Compact, Plug-and-Play Setup

8K60 HDMI Splitter – 1×4 Ultra HD Distribution Amplifier with Audio

PT-SP-BHDT14-48G


Standards & Compliance	Signal Standards	HDMI 2.1
	HDCP	HDCP 2.3, HDCP 1.4
	Regulatory Certifications	CE, FCC, RoHS, UL
Connector Types	HDMI Inputs	1 × HDMI IN (Type A, 19-pin female)
	HDMI Outputs	4 × HDMI OUT (Type A, 19-pin female)
	Toslink (Optical Square Plug)	Yes
	ARC	ARC HDMI
	Audio Outputs	Analog (L/R TRS, 3.5mm jack)
	Dante	No
Performance	Max Video Resolution	8K60 (4:2:0), 8K30 (4:4:4), 4K120 (4:4:4)
	Video Bandwidth	48 Gbps
	Color Space	RGB, YUV, YCbCr
	Color Depth	12-bit
	Dynamic Metadata Support	HDR10+, HDR10, HRD, Dolby Vision, HLG
	HDMI Audio Format	LPCM, Dolby Digital Plus, Dolby True Sound, Dolby Atmos, DTS, DTS-ES, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
	Optical Audio Format	LPCM, Dolby, DTS 5.1CH
	Analog Audio Format	LPCM 2 Channel
	Scaling	Auto
ESD Protection	IEC 61000-4-2 (±8 kV)	
Power	Power Input	AC 100 - 240V 50/60Hz
	Power Supply	DC 12V/2.5A
	Power Consumption	10W (Max)
Environmental	Operating Temperature	32 to 104°F / 0 to 40°C
	Storage Temperature	-4 to 140°F / -20 to 60°C
	Relative Humidity	20 to 90% RH (no condensation)

8K60 HDMI Splitter – 1x4 Ultra HD Distribution Amplifier with Audio

PT-SP-BHDT14-48G

Enclosure	Rack Mounting Option	No
	Dimensions	Width: 6.9in (176mm) Depth: 2.7in (68mm) Height: 0.71in (18mm)
	Weight	0.65lbs (295g)
Warranty	Parts	1 year
	Labor	1 year

Application Diagram

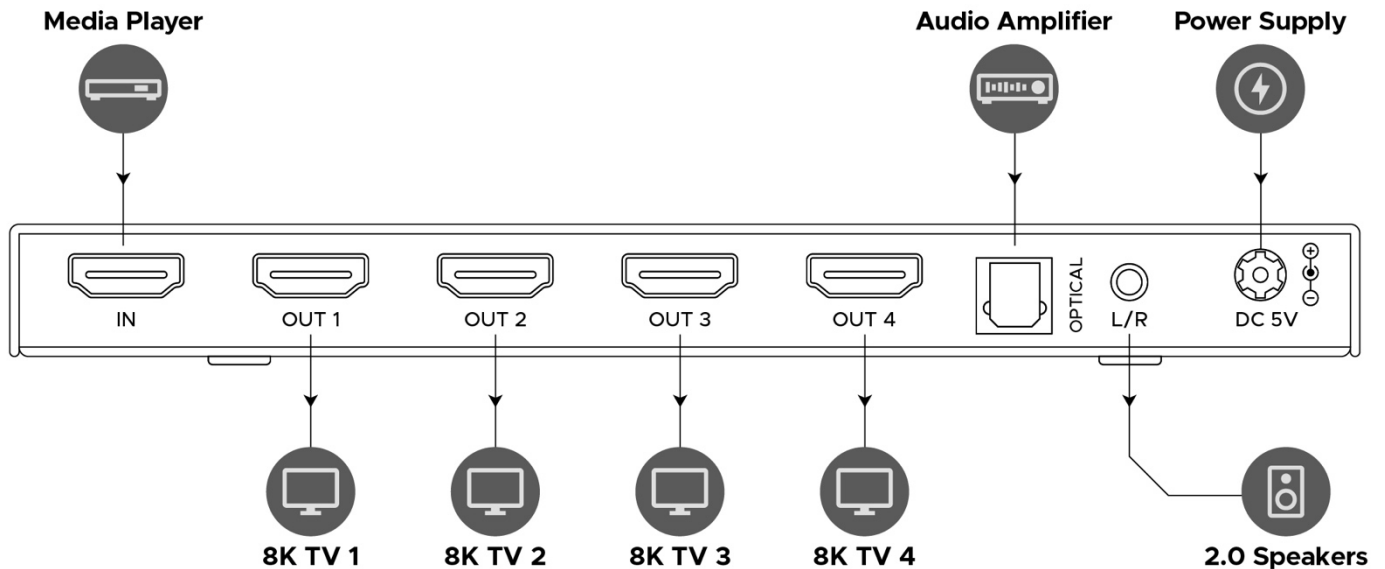

For further information,
contact support@bundltech.com

© 2025 Bundl. Bundl, the Bundl logo, and other Bundl marks are owned by Bundl and may be registered trademarks. All other trademarks are the property of their respective owners. Bundl assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein are subject to change without notice.