
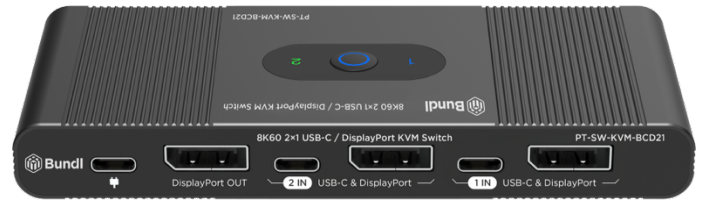


8K60 2x1 USB-C / DisplayPort KVM Switch

PT-SW-KVM-BCD21

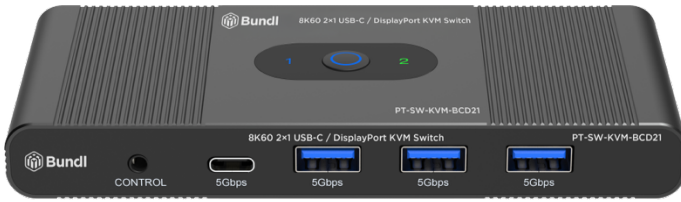

Overview

Streamline your workstation or gaming setup with the 8K60 2x1 USB-C / DisplayPort KVM Switch, designed to let a single 8K60 DisplayPort monitor be shared between two devices using USB-C or DisplayPort. It delivers precise 8K60 visuals and smooth motion, keeping both sources ready for work or play without interruption.

Ideal for creative studios, multi-device desktops, and gaming rigs, this 2x1 KVM also enables USB sharing through three USB-A 3.0 ports and one USB-C 3.0 port, allowing keyboards, mice, and other peripherals to be used across both systems seamlessly.

Switching between devices is intuitive – the top-mounted input button and included remote switch provide direct control, while color-coded LED indicators clearly show which source is active. Compact, reliable, and plug-and-play ready, the 8K60 2x1 USB-C / DisplayPort KVM Switch makes high-performance multi-device workflows simple and dependable.

Standards & Compliance



Key Features

Support for 8K60 Displays

DisplayPort Output Compatible with HDMI via Adapter Cable

USB-C & DisplayPort Inputs

Switch Between Two Devices Easily

Share USB Accessories Between Devices

Simple Button or Remote Switching

Clear LED Indicators

Smooth, Lag-Free Performance

Compact, Plug-and-Play Setup

8K60 2x1 USB-C / DisplayPort KVM Switch

PT-SW-KVM-BCD21


Standards & Compliance	Signal Standards	USB 3.0
	Regulatory Certifications	CE, FCC, RoHS
Connector Types	USB Input	2 × USB IN (USB-C)
	USB Output	4 × USB OUT (3 × USB-A, 1 × USB-C)
	DisplayPort Input	2 × DP IN (20-pin female)
	DisplayPort Output	1 × DP OUT (20-pin female)
	Control	3.5mm jack female connector (proprietary wired remote button)
Performance	Max Video Resolution	8K60 (4:4:4)
	Video Bandwidth	32.4 Gbps
	Color Space	RGB
	Color Depth	12-bit, 10-bit
	Dynamic Metadata Support	HDR10+, HDR10, Dolby Vision, HLG
	MTBF	50,000 hours
	USB Audio Format	PCM, Bitstream, Dolby, DTS, DSD
	ESD Protection	EN61000-4-2 Standard
Communications & Control	Control Ports	Proprietary wired remote button
	Control Connector Type	3.5mm TRS
Power	Power Input	USB-C power adapter (not included)
	Power Supply	DC 5V/2A
	Power Consumption	4W (Max)
Environmental	Operating Temperature	32 to 122°F / 0 to 50°C
	Storage Temperature	14 to 140°F / 10 to 60°C
	Relative Humidity	5 to 80% RH (no condensation)

8K60 2x1 USB-C / DisplayPort KVM Switch

PT-SW-KVM-BCD21

Enclosure	Dimensions	Width: 8.7in (220mm) Depth: 3.9in (100mm) Height: 1.21in (30mm)
	Weight	0.34 lbs (152g)
Warranty	Parts	1 year
	Labor	1 year

Application Diagram

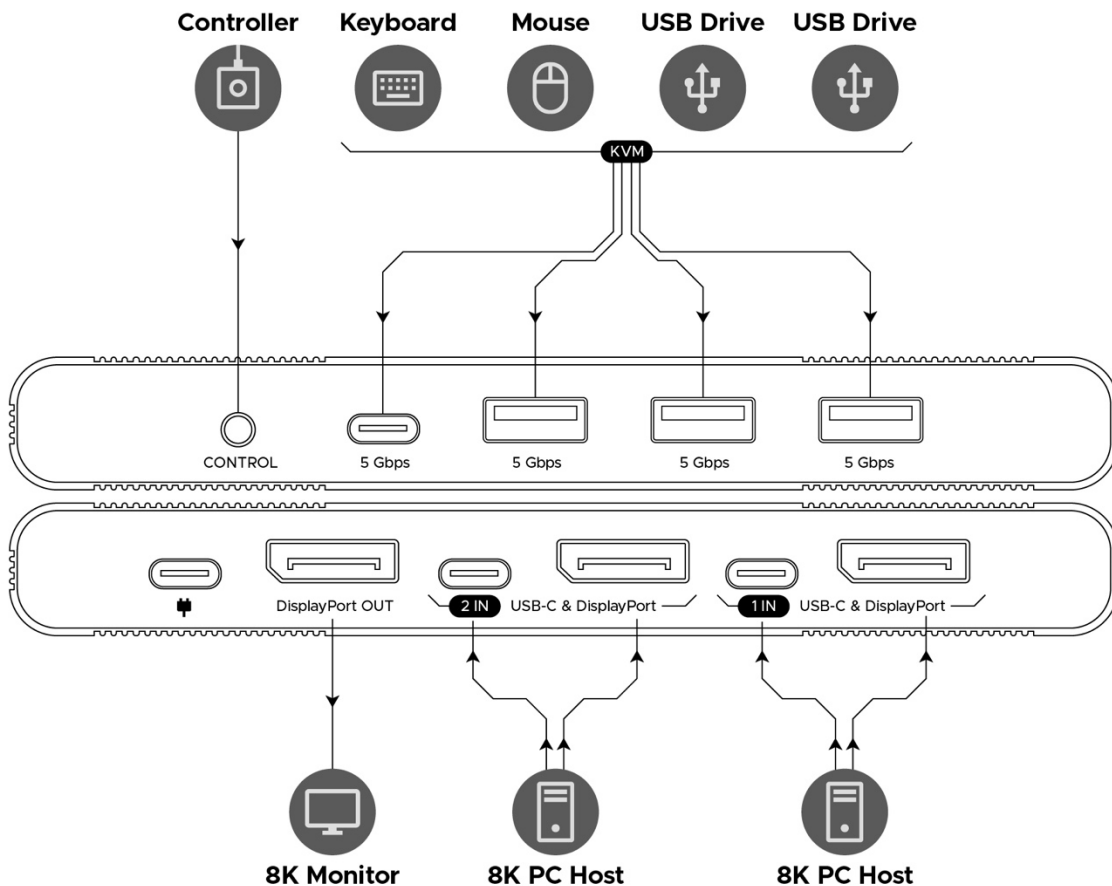

For further information,
contact support@bundltech.com

© 2025 Bundl. Bundl, the Bundl logo, and other Bundl marks are owned by Bundl and may be registered trademarks. All other trademarks are the property of their respective owners. Bundl assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein are subject to change without notice.